


Product news



Transport safety device **TROLLEY**



Transport safety device **BASE**

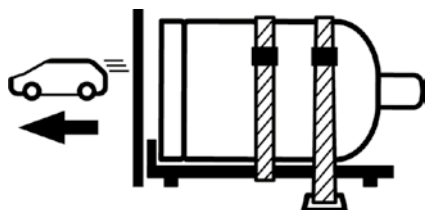

Transport information

Transport safety device for gas cylinders

for the stable securing of gas cylinders in the vehicle with a filling weight of up to 11 kg

The transport safety device ensures the safe transport of the gas cylinder while driving. The gas cylinder is firmly lashed to the stable frame, and also has to be secured with the use of the fixing points in the vehicle (e. g. lashing eyelets).

This protects the gas cylinder against uncontrolled movements, and prevents soiling or damage in the boot of the vehicle.

Rubber studs on the underside also provide the transport safety device with a secure hold on slippery surfaces in the boot.

Advantages and equipment

- for gas cylinders with a diameter of 230 to 320 mm
- TROLLEY version with handle extendible in two stages, to 740 mm or 980 mm
- thanks to the wheels and the extendable handle, the TROLLEY version makes it possible to transport the gas bottle effortlessly and comfortably without exerting too much force

Technical data

- Maximum load capacity: 30 kg
- Weight **TROLLEY**: 2.6 kg
- Weight **BASE**: 1.1 kg
- Dimensions **TROLLEY**, H/W/D: 553 x 320 x 280 mm
- Dimensions **BASE**, H/W/D: 508 x 220 x 52 mm

Notice

- The transport safety device must be secured against slipping while driving using the lashing straps provided via the attachment points in the vehicle (e. g. lashing eyelets). It should be positioned in the boot or the loading area, preferably crosswise or with the base of the cylinder facing the direction of travel (against the wall) (refer to image).
- The transport safety device was developed especially for the requirements of private use.
- The withdrawal from a gas cylinder must take place in the standing position!
- It is necessary to ensure that adequate ventilation is provided during transport.
- The rules of the DVFG instruction sheet "Transporting LPG cylinders with motor vehicles" apply.
- When transporting LPG cylinders with motor vehicles, LPG cylinders may not be placed in the vehicle until immediately before the start of the journey, and when the journey is over, they must be removed immediately.
- The gas cylinder is not included in the scope of delivery!

Transport safety device for gas cylinders

TROLLEY

complete

27 601 00

Transport safety device for gas cylinders

BASE

complete

27 600 00